
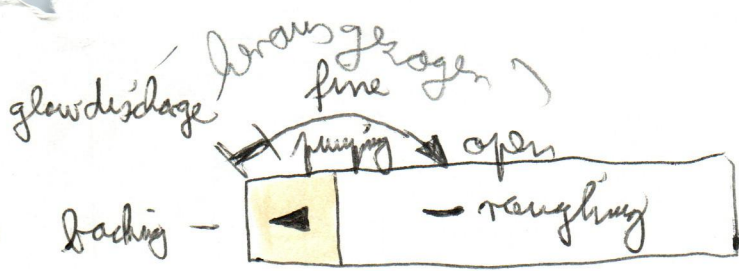






Bedienelemente Aufdampfanlage

J, 15.05.91

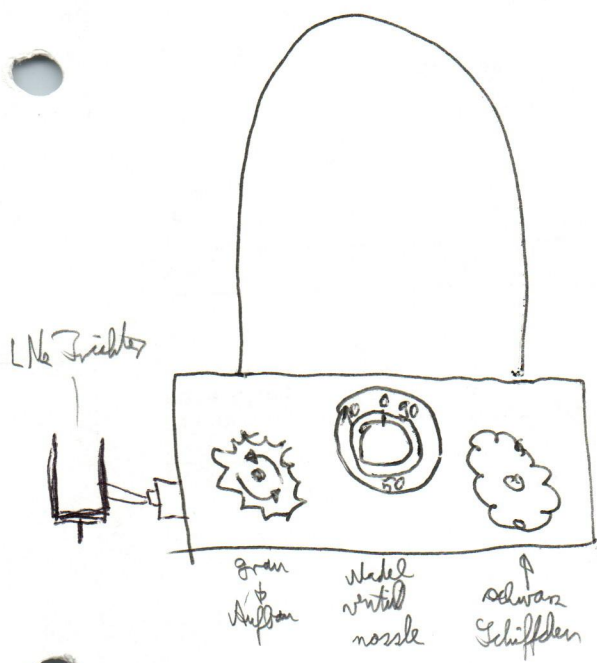

valves
 closed
 lin
 gedrückt
 anders Wand:

- E-Hauptschalter
- Wasserkahn
- Wasswächter
- LFB-Schalter

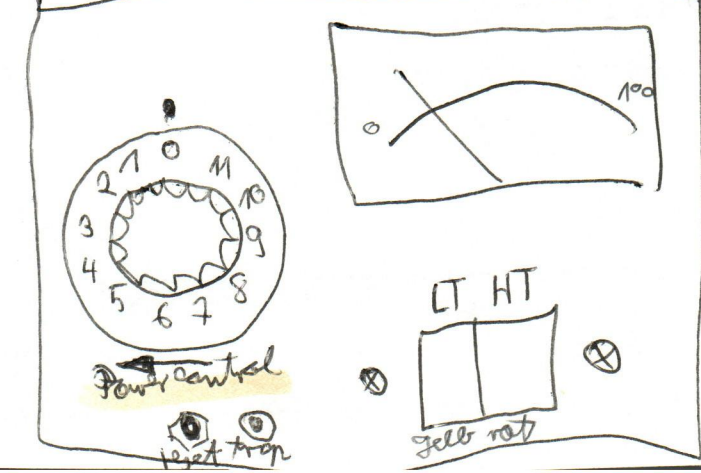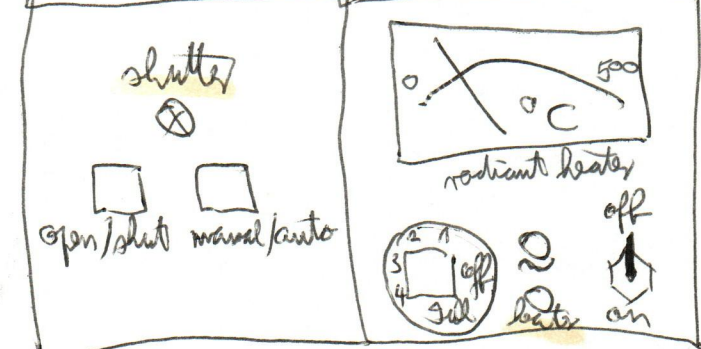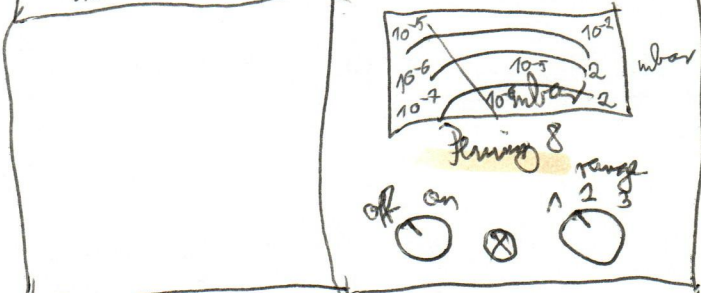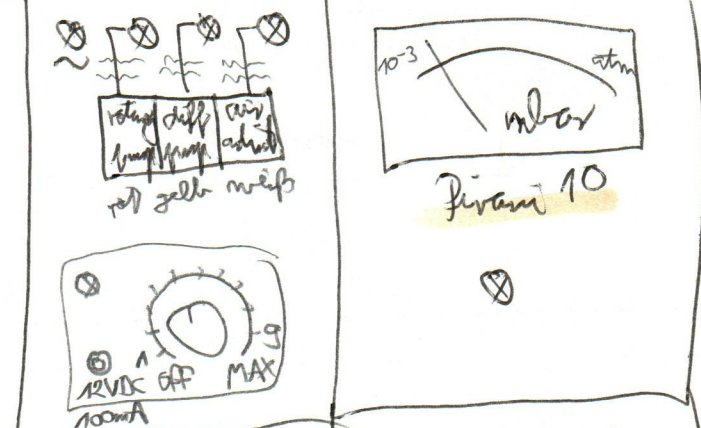

1. 2 TYP 483 (10 DEEP)
5 EACH SPACED ON

2 HOLES DRILL 7/8" DIA
1/8" DEEP

2 HOLES DRILL 7/8" DIA
1/8" DEEP

10 TYPE 6 ELECTRODE HOLES
SPACED AS SHOWN ON 2413 R.C.D.

2413

5 TYPE 7 ELECTRODE HOLES
SPACED AS SHOWN ON

ALL ANGLES TO BE TRUE WITHIN 10-15"

Maß nochmal
telefonisch
verifiziert
11.07.90 15:01

PUNCH CHARACTER 3/4" HIGH LYING
PARALLEL TO VERTICAL & AS SHOWN ON
A 100. PITCH AND DEPTH OF CHARACTER
TO BE CONSISTANT

2 HOLES DRILL 1/8" DIA 5" DEEP
1/8" DEPTH R.C.D. AS SHOWN ON
UNDER SIDE ON A 292 R.C.D.

2604

3 HOLES DRILL 1/8" DIA 1/8" DEEP
ON 250-4 R.C.D.

